


Color Document Scanner

KV-S4085CW/KV-S4085CL·KV-S4065CW/KV-S4065CL

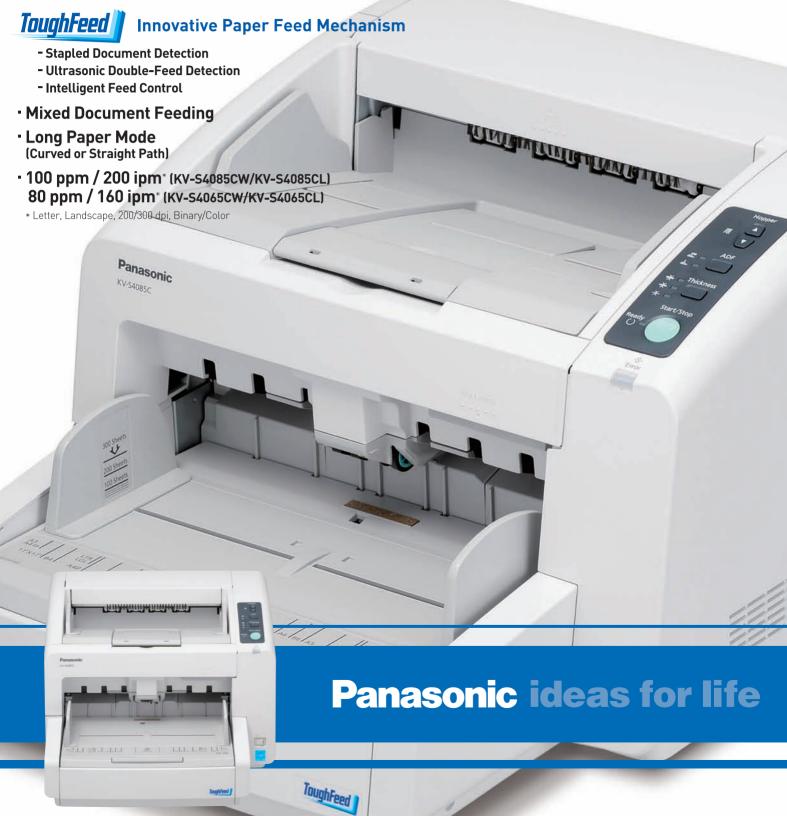

Accurate Feeding for Various Paper Types

Have you ever had your work interrupted by a scanner jam, and then found out that important documents were damaged? Or after you've finished scanning, have you discovered that one or more pages were missed? Our innovative scanner uses a reliable, industry-first paper feed mechanism to quickly detect stapled documents and halt scanning to minimize damage to the optical glass

and the document. It also senses double-sheet feeding to prevent misfeedings. This minimizes errors and problems in large scanning runs. Plus, it features full-color scanning (200 or 300 dpi) at up to 200 ipm* with clear, high-resolution results.

*When using the KV-S4085CW Letter, Landscape, 200/300 dpi, Binary/Color.



High-Reliability Scanning


Accurately Feeds Various Size of Documents


Mixed Document Feeding*1


Documents with different sizes and thicknesses can all be fed together. They can be set in center, left, or right alignment. By using left or right single-side alignment, there is no more need to spend time organizing documents according to their size, so scanning is fast and easy. This function greatly increases work efficiency.

ve wide scanning of KV-S4065CL and KV-S4085CL are Letter










The scanner feeds accurately, regardless of alignment.

High-Speed Scanning of Sheets up to 100 feet Long

Long Paper Mode

The highly reliable paper feed mechanism quickly and stably scans long documents too. Using the straight path, this boosts work efficiency by smoothly scanning long monitoring sheets, like those used for EKG documents, and thick documents.




Two path types enable long-sheet scanning.



Innovative Paper Feed Mechanism

Preventing Damage to the Scanning Glass **Stapled Document Detection**

Multiple sensors are used to detect various types of stapled documents, and to immediately stop the scanner when stapling is detected. This minimizes damage to both the document and the optical glass.

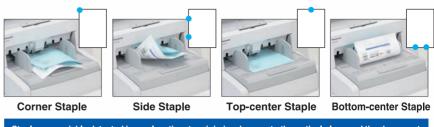


Staples are quickly detected in any location, to minimize damage to the optical glass and the document.

Accurate Scanning


Ultrasonic Double-Feed Detection

Ultrasonic sensors detect double feeds. The KV-S4085CW/KV-S4085CL are equipped with three ultrasonic sensors to cover a larger area of the document, rather than the center only, for versatile detection of small documents mixed among regular-sized documents.

*KV-S4065CW/KV-S4065CL have one sensor.



Three sensors* detect double feeding and stop the scanner immediately.




High-performance sensors catch even subtle changes.

Smooth Feeding New System Intelligent Feed Control


Multiple sensors check the paper feed condition and automatically adjust the roller pressure to ensure that documents of various thicknesses are accurately fed. This makes it more reliable and accurate than conventional feed mechanism.

Checking



Multiple sensors constantly check the condition of the paper feed and the pressure between the document and the roller.

Adjusting



The sensors detect when the paper feed is not correct due to insufficient pressure.




The tray is raised to adjust the pressure and accurately feed the document.

High-Quality Image Processing

No More Need to Pre-Sort Automatic Binary/

Automatic Binary/ Color Distinction

This function automatically detects when a set of documents contains some color sheets and some monochrome (B/W) sheets. You can feed these together without sorting, and the machine will automatically compress the data efficiently according to whether a sheet is color or monochrome (B/W), so the electronic file size is minimized. This is a feature typically found only on high-end scanners.



The scanner detects color or B&W.

Pre-Printed Form Scanning

Multi Color Dropout

With Multi Color Dropout, you're no longer limited to removing only reds, greens and blues from pre-printed forms. Any color or color range can be selected for removal for more accurate OCR processing. And you're not limited to only one color — you can select up to three or even drop all colors saving only black.




The scanner makes it easier to read text data.

Eliminates Post-Processing

Automatic Crop and De-Skew

When you scan documents of mixed size, the documents are automatically cropped and stored in the appropriate size. Also, skewed documents are automatically straightened when they are scanned.




The scanner crops white space.

Easy Maintenance

The clamshell design allows full, easy access to the entire paper path, so you can clear paper jams or clean the unit without calling a service technician. The rollers are also easy to replace, improving the unit's cost-effectiveness, and have a long service life.








The clamshell opens widely.

Specifications KV-S4085CW/KV-S4085CL and KV-S4065CW/KV-S4065CL

| • | | | KV-S4085CW KV-S4085CL | KV-S4065CW KV-S4065CL | |
|---|------------|---------|--|---|--|
| Scanning Face | | | Duplex | | |
| Scanning Method | | | Contact-type Color Image Sensor Selectable black and white background reference | | |
| Scanning Speel Letter size 200/300 | Binary | Simplex | Up to 85 ppm (Portrait) Up to 100 ppm (Landscape) | Up to 65 ppm (Portrait) Up to 80 ppm (Landscape) | |
| | | Duplex | Up to 170 ipm (Portrait) Up to 200 ipm (Landscape) | Up to 130 ipm (Portrait) Up to 160 ipm (Landscape) | |
| | O dpi Colo | Simplex | Up to 85 ppm (Portrait) Up to 100 ppm (Landscape) | Up to 65 ppm (Portrait) Up to 80 ppm (Landscape) | |
| | | Duplex | Up to 170 ipm (Portrait) Up to 200 ipm (Landscape) | Up to 130 ipm (Portrait) Up to 160 ipm (Landscape) | |
| Resolution | | | 600 dpi Optical Resolution 100 - 600 dpi (1 dpi step) | | |
| Detection | | | Double feed detection (KV-S4085CW/KV-S4085CL: 3 positions, KV-S4065CW/KV-S4065CL: 1 position), Stapled document detection | | |
| Compression | | | JPEG (color, grayscale) | | |
| Image Output | | | Binary, Grayscale (8 bit), Color, MultiStream™ output | | |
| Binary Mode Halftone | | | Dither, Error diffusion | | |
| Image Control Executed by driver software or Panasonic RTIV™ | | | Dynamic Threshold, Automatic De-skewing, Automatic Crop, Automatic Binary/ Color Distinction, Blank Page Removal, Double Exposure, Multi Color Dropout, Smooth Background, Hole Removal, Border Removal, Noise Reduction, Detect File Separation Sheet and much more | | |
| Other Functions | | | Length control, Barcode detection (ISIS), Patch code detection, Automatic separation, Control sheet, Long paper mode | | |
| Long Paper Mode | | | 100 feet (30,480 mm) (crop pages to maximum 100 in. (2,540 mm) per page) | | |
| Scanning Size | | | KV-S4065CL / KV-S4085CL: 8.9 in. x 100 in. (227 mm x 2,540 mm) KV-S4065CW / KV-S4085CW: 11.9 in. x 100 in. (302 mm x 2,540 mm) | | |
| Documents *2 | Size (ADF) | Minimum | 1.9 in. \times 2.75 in. (48 mm \times 70 mm) In manual feed or thick paper modes: 1.9 in. \times 3.9 in. (48 mm \times 100 mm) | | |
| | | Maximum | 11.7 in. × 17 in. (297 mm × 432 mm) | | |
| | Weight | | Thin mode: 5 - 13 lbs. (20 - 50 g/m²) Normal mode: 13 - 42 lbs. (50 - 157 g/m²) Thick mode: 42 - 56 lbs. (157 - 209 g/m²) Auto mode: 5 - 42 lbs. (20 - 157 g/m²) | | |
| | Thickness | | 1.9 - 7.9 mils (0.04 - 0.2 mm) Straight path: max. 23.6 mils (0.6 mm) Note: 1 mil = 0.001 in. | | |
| Hopper Capacity | | | Up to 300 sheets (17 lbs., 64 g/m²) | | |
| Interface | | | USB 2.0 | | |
| Power Requirement | | | AC 100 - 240 V, 50/60 Hz | | |

| | | KV-S4085CW KV-S4085CL | KV-S4065CW KV-S4065CL | |
|--------------------------|----------------------------------|--|--------------------------|--|
| Power Consumption | Maximum (Scanning) | 1.5 A | 1.4 A | |
| | tion Minimum (Standby) | 0.7 A | 0.7 A | |
| | Sleep mode | 4 W or less | 4 W or less | |
| Operating Environment | | 59 °F - 86 °F (15 °C - 30 °C) | | |
| | ent Humidity | 20 - 80 % RH | | |
| Storage Environment | Temperature | 32 °F - 104 °F (0 °C - 40 °C) | | |
| | ent Humidity | 10 - 80 % RH | | |
| External [| Dimensions *3 (W x D x H) | 18.7 in. x 23.0 in. x 13.0 in. (474 mm x 585 mm x 329 mm) | | |
| Weight *3 | | 55 lbs. (25 kg) | | |
| Accessor | ies | CD ROM : Operation manual, Installation manual, RTIV™ manual, PIE manual, User Utility manual, Control data sheet, RTIV™ capture software, ISIS®/ TWAIN driver software, User utility software, Multi color dropout utility Power cord, USB cable & Blower | | |
| | Roller exchange kit | KV-SS033 | | |
| Options | Roller cleaning paper | KV-SS03 | | |
| | Imprinter unit (Pre and/or Post) | KV-SS014 | | |
| | Ink cartridge | KV-SS021 | | |

- *1 The scanning speed differs depending on the host computer, operating system, application, image data amount, and paper type.
 2 "Weight in pounds" of paper represents the weight of 500 sheets (17 in. x 22 in. / 432 mm x 559 mm).
 3 Dimensions and weights are approximate.

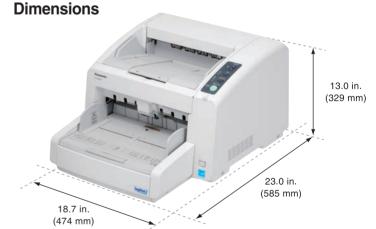















As an ENERGY STAR® Partner, Panasonic has determined that this product meets the ENERGY STAR guidelines for energy efficiency.

ENERGY STAR® and the ENERGY STAR certification marks are registered US marks. MultiStream™, ISIS® and ISIS-Certified™ are trademarks of Pixel Translations, a division of EMC Corporation.

All other brand or product names are the property of their respective holders. Design and specifications are subject to change without notice.

