

Ethernet System Controller

WV-CU950



PS•Data

One Unit, Total Control

KEY FEATURES

- Controller for the GX System, WJ-HD300A and WJ-HD220 Series of Digital Disk Recorders, and other PS-Data devices
- Controller for Matrix System650 and Matrix System150 (WJ-SX150A version 2.0 or higher)

Integrated System Control

Camera Control

- Detached joystick controls Pan/Tilt and Zoom, allowing seamless tracking.
- Larger numeric keypad provides direct access to cameras.

Recorder Control

- Jog Dial and Shuttle Ring for smoother control of WJ-HD300A Series recorders
- Dedicated Record, Play, and Search buttons

Switcher Control

- Image switching and sequencing buttons

Easy to Operate While Focused on Surveillance

Universal Design for Right or Left Hand Use

- Detached joystick pad
- Layout with Jog Dial and Shuttle Ring in center

More Comfortable Extended Surveillance

- Soft padding on joystick
- Adjustable joystick height for large or small hands
- Low center of gravity design and adjustable angle minimize strain

Instinctive Operation

- Cockpit style button layout


System Management Capability

- User level management for registered users
- User assignable buttons: four in main unit plus three in palm rest

SPECIFICATIONS

Power Source	9 V DC, 600 mA (using the supplied AC adapter)
Power Source (supplied AC adapter)	120 V AC, 60 Hz, 200 mA
Ethernet Port	10Base-T/100Base-TX, RJ-45 x1
Data Output/Input Port	6-conductor modular jack (RS-485, Full duplex) x2
Serial Port	9-pin D-sub connector
Controller Number	1 to 8 (rotary switch)
Ambient Operating Temperature	-10 °C to +50 °C (14 °F to 122 °F)
Unit Number Selection	1 to 99
Monitor Number Selection	1 to 99
Camera Number Selection	1 to 256
Dimensions (W x H x D)	Main Unit: 290 x 111 x 221 mm (11-7/16" x 4-3/8" x 8-11/16") 3D Joystick Unit: 134 x 146 x 218 mm (5-1/4" x 5-3/4" x 8-9/16")
Weight (without the AC adapter)	Main Unit: 1.3 kg (2.86 lbs.) 3D Joystick Unit: 0.8 kg (1.76 lbs.)

MAJOR OPERATING CONTROLS

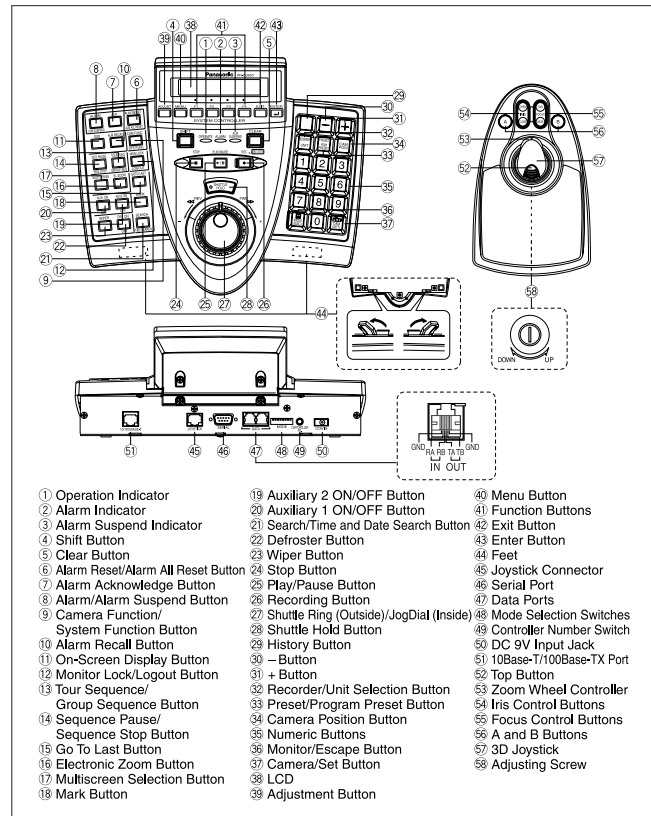

DIMENSIONS

