



WhisperFit[®] EZ VENTILATION FAN




FV-08-11VF5

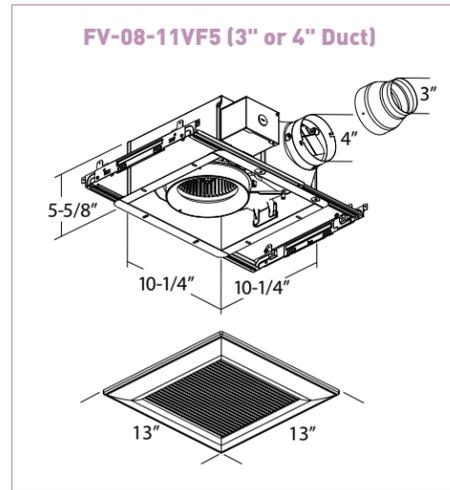

FV-08-11VFM5

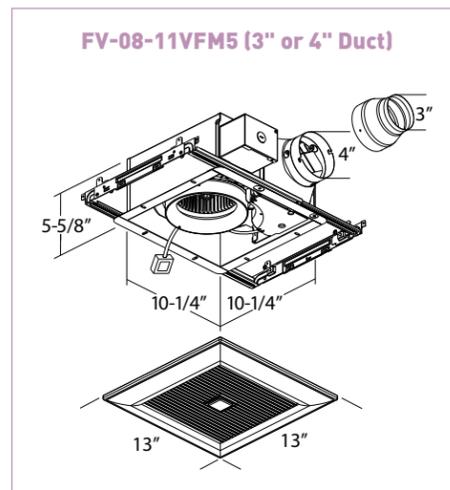

**FV-08-11VFL5
(with 3" duct adapter)**

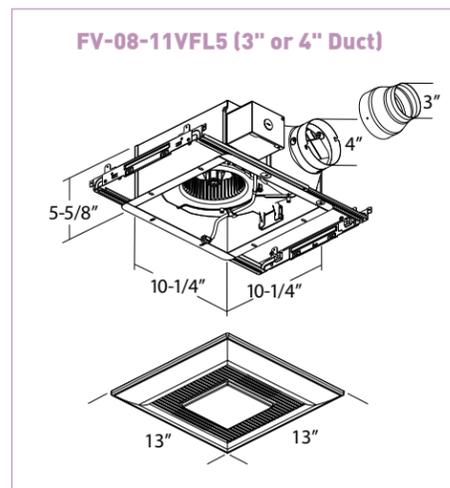

WhisperFit[®] EZ fans are ideal for residential remodelling, hotel new construction or renovation. One Fan, you choose the CFM. Our unique built-in Pick-A-Flow[™] speed selector allows you to choose the CFM (80 or 110).

- Flex-Z Fast[™] bracket provides flexible, fast and easy installation
- Includes 4" to 3" detachable duct adapter; provides greater flexibility
- Low profile housing design fits in 2 x 6 construction and perfect for remodelling projects and manufactured structured homes
- Lighted models feature a contemporary grille design with two 13W self-ballasted GU24 base CFLs and a convenient 4-Watt night-light
- Model FV-08-11VFM5 incorporates a SmartAction[®] Motion Sensor
- Remarkable performance and quiet operation at 0.25" w.g.

ADDITIONAL BENEFITS

- cUL listed for tub/shower enclosure when used with a GFCI protected circuit
- Fully enclosed condenser motor for long life
- Rated for 30,000 hours continuous run
- Can be used to comply with ASHRAE 62.2 and LEED
- 3-year warranty on parts, 1 year on CFL's

Panasonic

Panasonic Canada Inc.
5770 Ambler Drive, Mississauga, ON L4W 2T3
Phone (800) 669-5165 Fax (905) 238-2414
Email: ventilationfans@ca.panasonic.com
panasonic.com



As an ENERGY STAR[®] Partner, Panasonic has determined that this product meets the ENERGY STAR[®] Guidelines for energy efficiency.




WFEZ-08-2015 EN

WhisperFit® EZ is the perfect solution for any remodeler looking to quickly and easily replace an existing fan from below the ceiling. This fan enables you to utilize existing duct, while its low profile housing design ensures a proper fit in virtually any ceiling. Installation is made simple with the Flex-Z Fast™ installation bracket with articulating joints for easy positioning through a ceiling cavity. The detachable installation adapter provides even greater flexibility when wiring and attaching the duct. Once installed, use the Pick-A-Flow™ speed selector to customize the air flow to meet your customers' ventilation needs. All of these great features combined make WhisperFit® EZ the fastest, easiest, ENERGY STAR® retrofit fan available.

With WhisperFit® EZ, installation is as Easy as 1-2-3!

Step 1: Install Flex-Z Fast™ installation bracket with existing 3" duct and wiring.

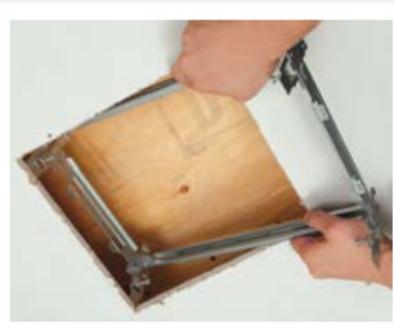

Flex-Z Fast™ Installation Bracket



Flex-Z Fast™ Installation Bracket Installed with Existing Duct and Wiring

Step 2: Detach installation adapter from the housing to connect wiring and attach duct.



Detachable Installation Adapter Simply Slides Off



Wiring and Duct Installation Made E-Z

Step 3: Fan is installed and ready to go!



Installed Performance and Quiet Operation at 0.25" w.g. Static Pressure

ASHRAE 62.2, ENERGY STAR®, LEED for Homes, and HVI have set the industry standard for performance measurement at 0.25" w.g. WhisperFit® EZ fans not only provide powerful CFM output at 0.25" w.g., but our sones have also been certified at 0.25" w.g., so they are quiet under pressure and after installation.

| WhisperFit®EZ | | FV-08-11VF5 (FAN) | | | | FV-08-11VFM5 (FAN WITH MOTION SENSOR) | | | | FV-08-11VFL5 (FAN/LIGHT) | | | | | | | | | | | | | | | |
|---|--|---|------|---------|------|---|------|---------|------|---|------|------------------|------|--------|------|------|------|------|------|------|------|------|------|------|------|
| SPECIFICATIONS | | 4" Duct | | 3" Duct | | 4" Duct | | 3" Duct | | 4" Duct | | 3" Duct | | | | | | | | | | | | | |
| Characteristics (HVI tested data for 0.1" S.P.) | Static pressure in inches w. g. | 0.1 | 0.25 | 0.1 | 0.25 | 0.1 | 0.25 | 0.1 | 0.25 | 0.1 | 0.25 | 0.1 | 0.25 | | | | | | | | | | | | |
| | Air Volume (CFM) | 110 | 104 | 100 | 85 | 80 | 73 | 70 | 61 | 110 | 102 | 100 | 88 | 80 | 71 | 70 | 59 | 110 | 102 | 100 | 86 | 80 | 72 | 70 | 60 |
| | Noise (sones) | 0.8 | 1.2 | 1.3 | 1.5 | 0.3 | 0.6 | 0.5 | 1.1 | 0.8 | 1.2 | 1.3 | 1.5 | 0.3 | 0.8 | 0.5 | 1.1 | 1.0 | 1.3 | 1.3 | 1.5 | 0.4 | 0.7 | 0.6 | 1.0 |
| | Power Consumption (watts) | 26.5 | 26.4 | 26.4 | 25.9 | 21.1 | 20.7 | 20.9 | 20.3 | 27.0 | 26.8 | 26.3 | 21.6 | 21.1 | 21.4 | 20.8 | 26.6 | 26.5 | 26.4 | 25.8 | 20.9 | 20.5 | 20.8 | 20.2 | |
| | Energy Efficiency (CFMs/watt) | 4.2 | 4.0 | 3.9 | 3.5 | 3.8 | 3.5 | 3.5 | 3.2 | 4.1 | 3.8 | 3.8 | 3.3 | 3.7 | 3.3 | 3.5 | 3.0 | 4.2 | 3.9 | 3.9 | 3.4 | 3.8 | 3.5 | 3.7 | 3.2 |
| | Speed (RPM) | 961 | 1179 | 1215 | 1369 | 848 | 1123 | 1005 | 1236 | 955 | 1174 | 1197 | 1352 | 847 | 1131 | 1008 | 1229 | 1033 | 1240 | 1270 | 1399 | 905 | 1164 | 1065 | 1263 |
| | Current (amps) | 0.23 | 0.23 | 0.22 | 0.22 | 0.18 | 0.17 | 0.17 | 0.17 | 0.23 | 0.23 | 0.23 | 0.22 | 0.18 | 0.18 | 0.18 | 0.17 | 0.23 | 0.22 | 0.22 | 0.22 | 0.17 | 0.17 | 0.17 | 0.17 |
| | MAX. current (amps) | 0.23 | | 0.20 | | 0.23 | | 0.18 | | 0.17 | | 0.17 | | 0.17 | | | | | | | | | | | |
| | Power Rating (V/Hz) | 120/60 | | 120/60 | | 120/60 | | 120/60 | | 120/60 | | 120/60 | | 120/60 | | | | | | | | | | | |
| Specifications | Motor Type | AC | | AC | | AC | | AC | | AC | | AC | | | | | | | | | | | | | |
| | Type of Motor Bearing | Ball | | Ball | | Ball | | Ball | | Ball | | Ball | | | | | | | | | | | | | |
| | Thermal Fuse Protection | Yes | | Yes | | Yes | | Yes | | Yes | | Yes | | | | | | | | | | | | | |
| | Blower Wheel Type | Sirocco | | Sirocco | | Sirocco | | Sirocco | | Sirocco | | Sirocco | | | | | | | | | | | | | |
| | ENERGY STAR® Qualified | Yes | | Yes | | Yes | | Yes | | Yes | | Yes | | | | | | | | | | | | | |
| Installation | Duct Diameter -inches (mm) | 4 / 3 (102 / 76) | | | | 4 / 3 (102 / 76) | | | | 4 / 3 (102 / 76) | | | | | | | | | | | | | | | |
| | Mounting Opening -Square inches (mm) | 10-1/2 (267) | | | | 10-1/2 (267) | | | | 10-1/2 (267) | | | | | | | | | | | | | | | |
| | Housing Dimensions (LxWxH)-inches (mm) | 10-1/4 x 10-1/4 x 5-5/8 (260 x 260 x 143) | | | | 10-1/4 x 10-1/4 x 5-5/8 (260 x 260 x 143) | | | | 10-1/4 x 10-1/4 x 5-5/8 (260 x 260 x 143) | | | | | | | | | | | | | | | |
| | Grille Size -Square inches (mm) | 13 (330) | | | | 13 (330) | | | | 13 (330) | | | | | | | | | | | | | | | |
| Light Specifications | Lamp Watts | / | | | | | | | | | | 2 x 13W | | | | | | | | | | | | | |
| | Lumens (lm) | | | | | | | | | | | 998 lm per lamp* | | | | | | | | | | | | | |
| | Lumens Per Watt (LPW) | | | | | | | | | | | 75 LPW* | | | | | | | | | | | | | |
| | Colour Rendering Index | | | | | | | | | | | >80 | | | | | | | | | | | | | |
| | Colour Temperature (Kelvin) | | | | | | | | | | | 3500 K | | | | | | | | | | | | | |
| | Rated Life (hours) | | | | | | | | | | | 10,000 | | | | | | | | | | | | | |
| | Lamp Model # | | | | | | | | | | | MLS13GU35 | | | | | | | | | | | | | |
| | Type of Lamp Socket | | | | | | | | | | | GU24 | | | | | | | | | | | | | |
| Night-Light Specs | Night Light Watts | 4W | | 4W | | | | | | | | | | | | | | | | | | | | | |
| Shipping | Gross Weight - lbs | 11.2 | | 11.2 | | 11.9 | | 11.9 | | 12.6 | | 12.6 | | | | | | | | | | | | | |
| | Approved Code/Standard/Regulation | cUL tub/Shower Enclosure | Yes | | Yes | | Yes | | Yes | | Yes | | Yes | | | | | | | | | | | | |
| Mfg in ISO 9001 Certified Facility | | Yes | | Yes | | Yes | | Yes | | Yes | | Yes | | | | | | | | | | | | | |

*As tested by an EPA recognized lab NOTE: 0.25" w.g. = Installed Performance



Lighted Model

WhisperFit® EZ contemporary flush mount grille incorporates two 13W ENERGY STAR® rated self-ballasted GU24 base CFL lamps and a 4W night light. 3500 Kelvin >80 CRI/998 Lumens per lamp*/ 75 Lumens Per Watt/10,000 hours rated average life/equivalent to two 75W incandescent lamps.

*(2) 13W self-ballasted GU24 base CFL lamps included

